

技术规范 Technical Parameter


设计依据 Design Standard	GB/12237	ANSI API1608	JIS B2071
结构长度 Structural length	GB/T12221	ASME B16.10	JIS B2002
连接法兰 Connecting Flange	GB/T9113	ASME B16.5	JIS B2212 B2214
试验和检验 Test & Inspection	GB/T12237	API6D API 598	JIS B2003

执行器参数 Actuator Technical Parameters

开关型 ON-OFF Type	反馈信号：有源触点/无源触点（干触点）信号/ 4-20mA /电阻信号 Feedback: the Active Contact Signal, Passive Contact Signal, Resistance, 4-20mA
调节型 Regulation Type	输入/输出信号 4-20mA/0-10 V/1-5 V Input & Output Signal: DC 4-20mA, DC 0-10V, DC 1-5V
现场可操型 Field Operation	带现场/远程控制开关、调节型以及 MODBUS, PROFIBUS 现场总线 The Field, Remote Control Switch Regulation and MODBUS, PROFIBUS Field Bus
电压 Optional Voltage	AC110-240V 380V 50/60Hz; DC12V, DC24V, 特殊电压可定制 AC110-240V 380V 50/60Hz; DC12V, DC24V, Special Voltage Can be Customized

产品参数 Technical Parameters

公称通径 Nominal Size	DN15~DN300
阀体材质 Body Material	铸铁、碳钢(WCB)、不锈钢(CF8、CF8M) Cast Iron, Carbon Steel(WCB), Stainless Steel(CF8, CF8M)
连接类型 Connection Type	法兰 Flange
压力等级 Pressure Rating	PN1.6-PN6.3MPa
结构类型 Structure type	浮动球芯直动式; Floating ball core, 3way-T type, 3way-L type
阀座密封 Seat Material	PTFE: -30℃ ~180℃
阀芯材质 Core Material	SS304, SS316, SS316L
阀杆材质 Stem Material	SS304, SS316, SS316L
适用介质 Applicable Medium	水,液体,气体,油,粉,蒸汽,酸碱腐蚀性介质。 Water, Liquids, Gas, Oil, Powder, Steam, Acid-base Corrosive Medium.

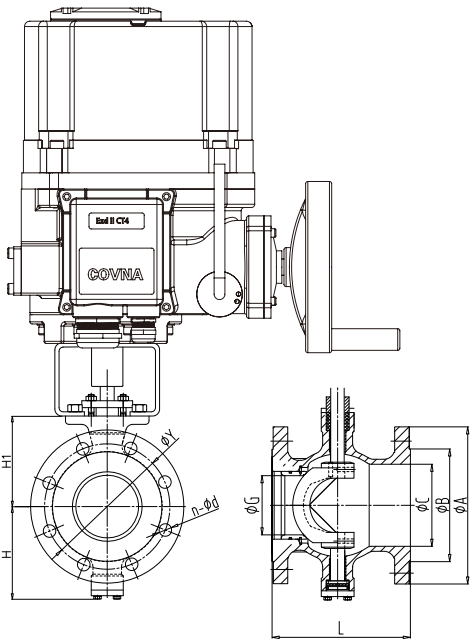

主要外形及连接尺寸 Main Outline and Connecting (1.6Mpa)

MEDLE	DN25	DN32	DN40	DN50	DN65	DN80	DN100	DN125	DN150	DN200
Inch	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"
A	115	140	150	165	185	200	220	250	285	340
B	65	76	84	99	118	132	156	184	211	266
C	38	45	50	62	73	90	115	134	164	206
G	20	25	32	40	55	62	80	100	125	155
Y	85	100	110	125	145	160	180	210	240	295
n-φ d	4-φ14	4-φ18	4-φ18	4φ18	8-φ18	8-φ18	8-φ18	8-φ18	8-φ22	12-φ22
L	102	102	114	124	145	165	194	194	229	243
H	81	86	90	93	108	123	138	128	170	200
H1	178	183	185	195	210	223	235	250	270	320