



## POWER SUPPLY SYSTEM

### Class I + Class II (T1+T2), Single pole Surge Arrester

#### BP25VT...

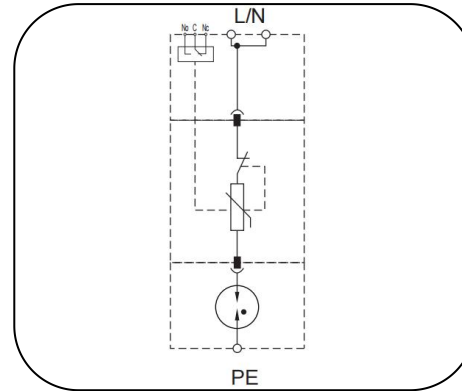

Basic circuit diagram

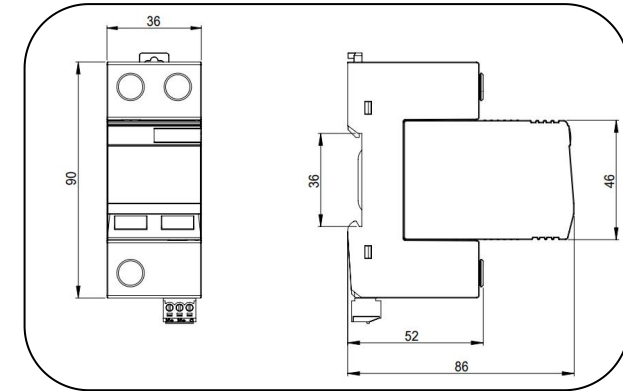

Dimension drawing

The BP25VT is class I & class II (or T1+T2 ) single pole combined SPD designed for low-voltage power system lightning current & surge protection, especially for location of high risk exposure or LPZ 0-2 building entrances ( IEC 62305-4) to against the damage from direct or close lightning strikes.

With built in Safesurge VT technology, BP25VT ensures remarkable lightning current discharge capacity up to 25kA 10/350μs and No leakage current & No follow current. It can be applied in most electrical installation and provide better reliability and safety protection, and particularly suitable for system with permanent insulation monitoring.

A notable feature of BP25VT is dual module redundancy design, two individual MOV protection modules in parallel in one pole SPD with two indication windows, so that the SPD could keep on working in spite of one protection module fault or one indication window turns to red. That will help to realize the uninterrupted surge protection, since user can replace the failure models according to the timing and the condition.

- TUV certified T1+ T2 SPD per IEC/EN 61643-11 standard.
- Single pole SPD for multi-purpose surge protection
- Unique thermal disconnecter design provides quick thermal response and secure disconnection
- Dual module redundancy for one pole SPD and dual fault indication windows, with optional remote signal contact.
- Lightning current capacity up to 25 kA10/350μs, surge current capability up to 100kA 8/20μs
- Low voltage protection level due to VT tech.
- High short-circuit current rating up to 50kArms, suitable for application in most AC power system.
- Long service life because of no leakage current and follow current
- Better reliability and robustness, Higher TOV (Temporary Over-Voltage) withstanding performance
- Pluggable module for easy replacement without the need to remove system wiring.
- Comply with UL1449 5<sup>th</sup>, IEEE C62.41, CSA C22.2 standards

## POWER SUPPLY SYSTEM


### Technical data

Part No.	BP25VT/75(-S)	BP25VT/150(-S)	BP25VT/180(-S)	BP25VT/275(-S)	BP25VT/320(-S)	BP25VT/350(-S)	BP25VT/385(-S)	BP25VT/440(-S)	BP25VT/480(-S)	BP25VT/600(-S)	BP25VT/750(-S)
In accordance with	IEC/EN 61643-11:2011; UL1449 5th										
Category IEC/EU/VDE	I+ II /1+2/ B+C										
Protection mode	L-N or L-PE or N-PE										
Nominal Voltage (AC)    Un	60V	120V	120V	230V	230V	277V	277V	400V	400V	480V	690V
Power frequency	50/60Hz										
Max. continuous operating voltage(AC) Uc	75V	150V	180V	275V	320V	350V	385V	440V	480V	600V	750V
Nominal discharge current (8/20)    In	25kA										
Max. discharge current (8/20)    I <sub>max</sub>	100kA										
Lightning impulse current (10/350)    I <sub>imp</sub>	25kA	25kA	25kA	25kA	25kA	25kA	25kA	25kA	22kA	15kA	12.5kA
Voltage protection level    Up	0.6kV	0.7kV	0.8kV	1.0kV	1.2kV	1.4kV	1.6kV	1.8kV	2.0kV	2.2kV	2.5kV
Response time    t <sub>A</sub>	≤100ns										
Temporary overvoltage TOV    U <sub>T</sub> Withstand mode 120min	115V	228V	242V	442V	442V	528V	528V	763V	763V	915V	1145V
Follow current & interrupt rating    I <sub>fi</sub>	No										
Leakage current    I <sub>pe</sub>	0mA										
Short-circuit current rating    I <sub>sscr</sub>	50 kArms										
Backup fuse(only required if not already provided in mains)	≤315A gL/gG										
Operating temperature range	-40°C ~ +85°C										
Altitude	-500m ~ +4000m										
Cross-section of connection wire (max)	Single-strand 35mm <sup>2</sup> ; multi-strand 25mm <sup>2</sup>										
Mounting	35mm DIN-rail in accordance with EN 50022/DIN46277-3										
Enclosure material	Thermoplastic; extinguishing degree UL94 V-0										
Degree of protection	IP20										
Installation width	2 modules, DIN 43880										
Thermal disconnecter	Internal    Green – normal ; red - failure										
Remote alarm contact	Optional										
Approvals, Certifications	TUV, CE										
Additional data for Remote Alarm Contacts											
Remote alarm contact type	Isolated Form C										
Switching capability Un/In	AC: 250V/0.5A      DC: 250V/0.1A; 125V/0.2A; 75V/0.5A										
Cross-section of remote signaling wire	Max. 1.5mm <sup>2</sup> (or # 16AWG)										


## POWER SUPPLY SYSTEM

### Class I + Class II (T1+T2), Two poles Surge Arresters

#### BP25VT...2P

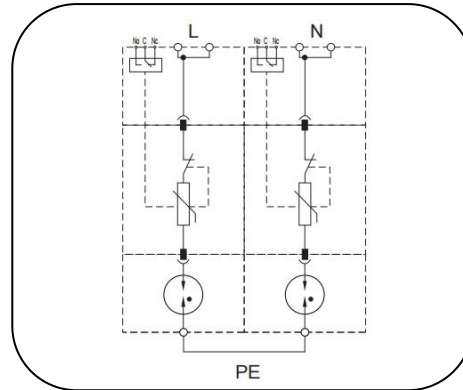

Basic circuit diagram

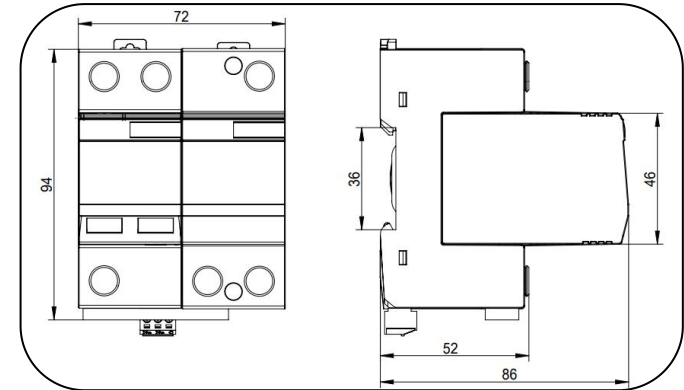

Dimension drawing

The BP25VT 2P is class I & class II (or T1+T2 ) prewired two poles combined SPD designed for low-voltage power system lightning current & surge protection, especially for location of high risk exposure or LPZ 0-2 building entrances ( IEC 62305-4) to against the damage from direct or close lightning strikes.

With built in Safesurge VT technology, BP25VT ensures remarkable lightning current discharge capacity up to 25kA 10/350μs and No leakage current & No follow current. It can be applied in most electrical installation and provide better reliability and safety protection, and particularly suitable for system with permanent insulation monitoring.

A notable feature of BP25VT is dual module redundancy design, two individual MOV protection modules in parallel in one pole SPD with two indication windows, so that the SPD could keep on working in spite of one protection module fault or one indication window turns to red. That will help to realize the uninterrupted surge protection, since user can replace the failure models according to the timing and the condition.

- TUV certified T1+ T2 SPD per IEC/EN 61643-11 standard.
- Prewired two poles SPD (“2+0” circuit) for use in single phase or two phase systems
- Unique thermal disconnecter design provides quick thermal response and secure disconnection
- Dual module redundancy for one pole SPD and dual fault indication windows, with optional remote signal contact.
- Lightning current capacity up to 25 kA10/350μs, surge current capability up to 100kA 8/20μs
- Low voltage protection level due to VT tech.
- High short-circuit current rating up to 50kArms, suitable for application in most AC power system.
- Long service life because of no leakage current and follow current
- Better reliability and robustness, Higher TOV (Temporary Over-Voltage) withstanding performance
- Pluggable module for easy replacement without the need to remove system wiring.
- Comply with UL1449 5<sup>th</sup>, IEEE C62.41, CSA C22.2 standards

## POWER SUPPLY SYSTEM


### Technical data

Part No.	BP25VT/75(-S)/2P	BP25VT/150(-S)/2P	BP25VT/180(-S)/2P	BP25VT/275(-S)/2P	BP25VT/320(-S)/2P	BP25VT/350(-S)/2P	BP25VT/385(-S)/2P	BP25VT/440(-S)/2P	BP25VT/480(-S)/2P	BP25VT/600(-S)/2P	BP25VT/750(-S)/2P
In accordance with	IEC/EN 61643-11:2011; UL1449 5th										
Category IEC/EU/VDE	I+ II /1+2/ B+C										
Protection mode	L-PE, N-PE										
Nominal Voltage (AC)    Un	60V	120V	120V	230V	230V	277V	277V	400V	400V	480V	690V
Power frequency	50/60Hz										
Max. continuous operating voltage(AC) Uc	75V	150V	180V	275V	320V	350V	385V	440V	480V	600V	750V
Nominal discharge current (8/20)    In	25kA										
Max. discharge current (8/20)    Imax	100kA										
Lightning impulse current (10/350)    Iimp	25kA	25kA	25kA	25kA	25kA	25kA	25kA	25kA	22kA	15kA	12.5kA
Voltage protection level    Up	0.6kV	0.7kV	0.8kV	1.0kV	1.2kV	1.4kV	1.6kV	1.8kV	2.0kV	2.2kV	2.5kV
Response time    tA	≤25ns										
Temporary overvoltage TOV    U <sub>T</sub> Withstand mode 120min	115V	228V	242V	442V	442V	528V	528V	763V	763V	915V	1145V
Follow current & interrupt rating    Ifi	No										
Leakage current    Ipe	0mA										
Short-circuit current rating    Isscr	50kArms										
Backup fuse(only required if not already provided in mains)	≤315A gL/gG										
Operating temperature range	-40°C ~ +85°C										
Altitude	-500m ~ +4000m										
Cross-section of connection wire (max)	Single-strand 35mm <sup>2</sup> ; multi-strand 25mm <sup>2</sup>										
Mounting	35mm DIN-rail in accordance with EN 50022/DIN46277-3										
Enclosure material	Thermoplastic; extinguishing degree UL94 V-0										
Degree of protection	IP20										
Installation width	4 modules, DIN 43880										
Thermal disconnecter	Internal    Green – normal ; red - failure										
Remote alarm contact	Optional										
Approvals, Certifications	TUV, CE										
Additional data for Remote Alarm Contacts											
Remote alarm contact type	Isolated Form C										
Switching capability Un/In	AC: 250V/0.5A					DC: 250V/0.1A; 125V/0.2A; 75V/0.5A					
Cross-section of remote signaling wire	Max. 1.5mm <sup>2</sup> (or # 16AWG)										


## POWER SUPPLY SYSTEM

### Class I + Class II (T1+T2), Two poles Surge Arresters

#### BP25VT...PN50

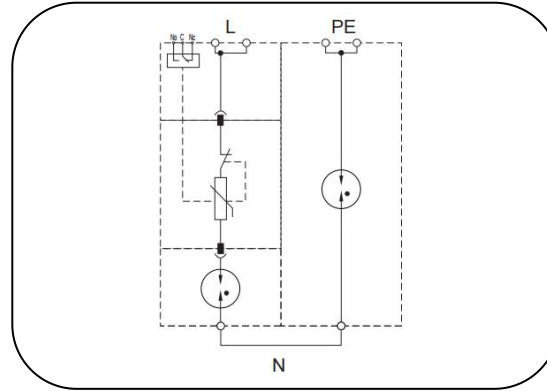

Basic circuit diagram

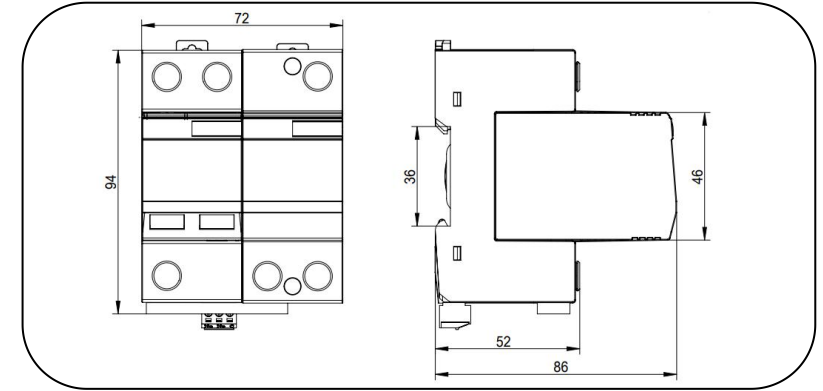

Dimension drawing

The BP25VT PN50 is class I & class II (or T1+T2 ) prewired two poles SPD designed for low-voltage power system lightning current & surge protection, especially for location of high risk exposure or LPZ 0-2 building entrances ( IEC 62305-4) to against the damage from direct or close lightning strikes.

With built in Safesurge VT technology, BP25VT ensures remarkable lightning current discharge capacity up to 25kA 10/350µs and No leakage current & No follow current. It can be applied in most electrical installation and provide better reliability and safety protection, and particularly suitable for system with permanent insulation monitoring.

A notable feature of BP25VT is dual module redundancy design, two individual MOV protection modules in parallel in one pole SPD with two indication windows, so that the SPD could keep on working in spite of one protection module fault or one indication window turns to red. That will help to realize the uninterrupted surge protection, since user can replace the failure models according to the timing and the condition.

- TUV certified T1+ T2 SPD per IEC/EN 61643-11 standard
- Prewired two poles SPD (“1+1” circuit) for use in single phase
- Unique thermal disconnecter design provides quick thermal response and secure disconnection
- Dual module redundancy for one pole SPD and dual fault indication windows, with optional remote signal contact.
- Lightning current capacity up to 25kA10/350µs (L-N), 50kA 10/350µs( (N-PE), Surge current capability up to 100kA 8/20µs
- Low voltage protection level due to VT tech.
- High short-circuit current rating up to 50kArms, suitable for application in most AC power system.
- Long service life because of no leakage current and follow current
- Better reliability and robustness, Higher TOV (Temporary Over-Voltage) withstanding performance
- Pluggable module for easy replacement without the need to remove system wiring.
- Comply with UL1449 5<sup>th</sup>, IEEE C62.41,CSA C22.2 standards

## POWER SUPPLY SYSTEM


### Technical data

Part No.		BP25VT/150(-S)/ PN50	BP25VT/180(-S)/ PN50	BP25VT/275(-S)/ PN50	BP25VT/320(-S)/ PN50	BP25VT/350(-S)/ PN50	BP25VT/385(-S)/ PN50	BP25VT/440(-S)/ PN50I	BP25VT/440(-S)/ PN50
In accordance with		IEC/EN 61643-11:2011; UL1449 5th							
Category IEC/EU/VDE		I+ II /1+2/ B+C							
Protection mode		L-N , N-PE							
Max. continuous operating voltage(AC) Uc	L-N	150V	180V	275V	320V	350V	385V	440V	440V
	N-PE	150V	150V	255V	255V	255V	255V	255V	440V
Nominal discharge current (8/20) In	L-N	25kA							
	N-PE	50kA							
Max. discharge current (8/20) Imax	L-N	100kA							
	N-PE	100kA							
Lightning impulse current (10/350) Iimp	L-N	25kA	25kA	25kA	25kA	25kA	25kA	25kA	25kA
	N-PE	50kA	50kA	50kA	50kA	50kA	50kA	50kA	50kA
Voltage protection level Up	L-N	0.7kV	0.8kV	1.0kV	1.2kV	1.4kV	1.6kV	1.8kV	1.8kV
	N-PE	1.5kV	1.5kV	1.5kV	1.5kV	1.5kV	1.5kV	1.5kV	2.0kV
Response time tA		L-N≤25ns; N-PE ≤100ns							
Temporary overvoltage TOV UT Withstand mode	L-N	228V/120min	242V/120min	442V/120min	442V/120min	528V/120min	528V/120min	763V/120min	763V/120min
	N-PE	1200V/200ms							
Follow current & interrupt rating Ifi	N-PE	100A							
Leakage current Ipe		0mA							
Short-circuit current rating Isscr		50kArms							
Backup fuse(only required if not already provided in mains)		≤315A gL/gG							
Operating temperature range		-40°C ~ +85°C							
Altitude		-500m ~ +4000m							
Cross-section of connection wire (max)		Single-strand 35mm <sup>2</sup> ; multi-strand 25mm <sup>2</sup>							
Mounting		35mm DIN-rail in accordance with EN 50022/DIN46277-3							
Enclosure material		Thermoplastic; extinguishing degree UL94 V-0							
Degree of protection		IP20							
Installation width		4 modules, DIN 43880							
Thermal disconnecter		Internal Green – normal ; red - failure							
Remote alarm contact		Optional							
Approvals, Certifications		TUV, CE							
Additional data for Remote Alarm Contacts									
Remote alarm contact type		Isolated Form C							
Switching capability Un/In		AC: 250V/0.5A DC: 250V/0.1A; 125V/0.2A; 75V/0.5A							
Cross-section of remote signaling wire (max)		1.5mm <sup>2</sup> (or # 16AWG)							


## POWER SUPPLY SYSTEM

### Class I + Class II (T1+T2), Three poles Surge Arresters

#### BP25VT...3P

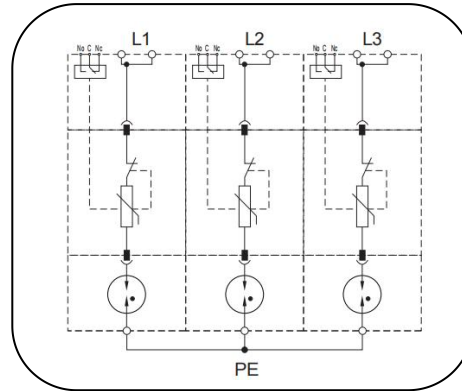

Basic circuit diagram

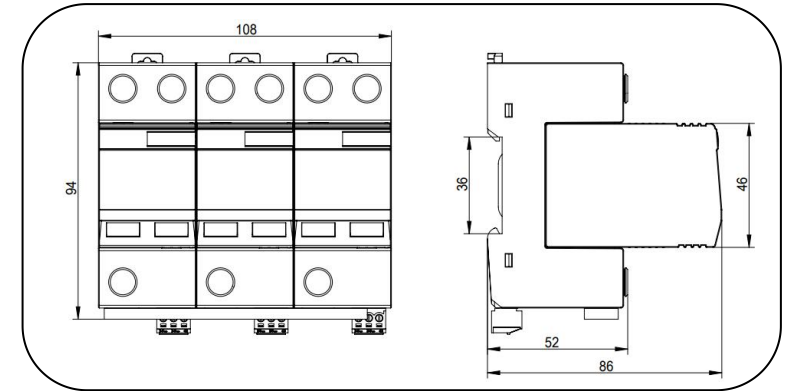

Dimension drawing

The BP25VT 3P is class I & class II (or T1+T2 ) prewired three poles combined SPD designed for low-voltage power system lightning current & surge protection, especially for location of high risk exposure or LPZ 0-2 building entrances ( IEC 62305-4) to against the damage from direct or close lightning strikes.

With built in Safesurge VT technology, BP25VT ensures remarkable lightning current discharge capacity up to 25kA 10/350μs and No leakage current & No follow current. It can be applied in most electrical installation and provide better reliability and safety protection, and particularly suitable for system with permanent insulation monitoring.

A notable feature of BP25VT is dual module redundancy design, two individual MOV protection modules in parallel in one pole SPD with two indication windows, so that the SPD could keep on working in spite of one protection module fault or one indication window turns to red. That will help to realize the uninterrupted surge protection, since user can replace the failure models according to the timing and the condition.

- TUV certified T1+ T2 SPD per IEC/EN 61643-11 standard.
- Prewired three poles SPD (“3+0” circuit) for use in three phase IT / TN-C systems.
- Unique thermal disconnecter design provides quick thermal response and secure disconnection
- Dual module redundancy for one pole SPD and dual fault indication windows, with optional remote signal contact.
- Lightning current capacity up to 25 kA10/350 μ s, surge current capability up to 100kA 8/20 μ s
- Low voltage protection level due to VT tech.
- High short-circuit current rating up to 50kArms, suitable for application in most AC power system.
- Long service life because of no leakage current and follow current
- Better reliability and robustness, Higher TOV (Temporary Over-Voltage) withstanding performance
- Pluggable module for easy replacement without the need to remove system wiring.
- Comply with UL1449 5<sup>th</sup>, IEEE C62.41,CSA C22.2 standards



## POWER SUPPLY SYSTEM

### Technical data


Part No.	BP25VT/75(-S)/3P	BP25VT/150(-S)/3P	BP25VT/180(-S)/3P	BP25VT/275(-S)/3P	BP25VT/320(-S)/3P	BP25VT/350(-S)/3P	BP25VT/385(-S)/3P	BP25VT/440(-S)/3P	BP25VT/480(-S)/3P	BP25VT/600(-S)/3P	BP25VT/750(-S)/3P
In accordance with	IEC/EN 61643-11:2011; UL1449 5th										
Category IEC/EU/VDE	I+ II /1+2/ B+C										
Protection mode	L-PE										
Nominal Voltage (AC)    Un	60V	120V	120V	230V	230V	277V	277V	400V	400V	480V	690V
Power frequency	50/60Hz										
Max. continuous operating voltage(AC) Uc	75V	150V	180V	275V	320V	350V	385V	440V	480V	600V	750V
Nominal discharge current (8/20)    In	25kA										
Max. discharge current (8/20)    Imax	100kA										
Lightning impulse current (10/350)    Iimp	25kA	25kA	25kA	25kA	25kA	25kA	25kA	25kA	22kA	15kA	12.5kA
Voltage protection level    Up	0.6kV	0.7kV	0.8kV	1.0kV	1.2kV	1.4kV	1.6kV	1.8kV	2.0kV	2.2kV	2.5kV
Response time    tA	≤25ns										
Temporary overvoltage TOV    UT Withstand mode 120min	115V	228V	242V	442V	442V	528V	528V	763V	763V	915V	1145V
Follow current & interrupt rating    Ifi	No										
Leakage current    Ipe	0mA										
Short-circuit current rating    Isscr	50 kArms										
Backup fuse(only required if not already provided in mains)	≤315A gL/gG										
Operating temperature range	-40°C ~ +85°C										
Altitude	-500m ~ +4000m										
Cross-section of connection wire (max)	Single-strand 35mm <sup>2</sup> ; multi-strand 25mm <sup>2</sup>										
Mounting	35mm DIN-rail in accordance with EN 50022/DIN46277-3										
Enclosure material	Thermoplastic; extinguishing degree UL94 V-0										
Degree of protection	IP20										
Installation width	6 modules, DIN 43880										
Thermal disconnecter	Internal    Green – normal ; red - failure										
Remote alarm contact	Optional										
Approvals, Certifications	TUV, CE										
Additional data for Remote Alarm Contacts											
Remote alarm contact type	Isolated Form C										
Switching capability Un/In	AC: 250V/0.5A					DC: 250V/0.1A; 125V/0.2A; 75V/0.5A					
Cross-section of remote signaling wire	Max. 1.5mm <sup>2</sup> (or # 16AWG)										




## POWER SUPPLY SYSTEM

### Class I + Class II (T1+T2), Four poles Surge Arresters

#### BP25VT...4P

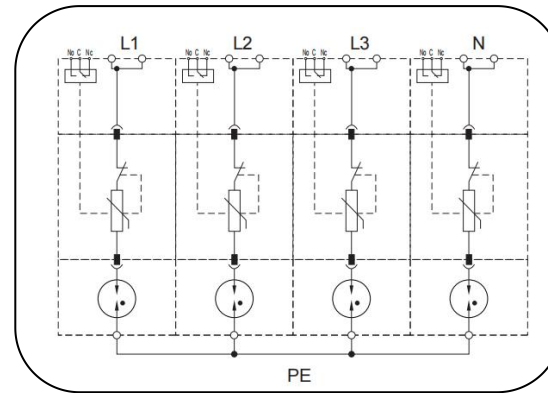

Basic circuit diagram

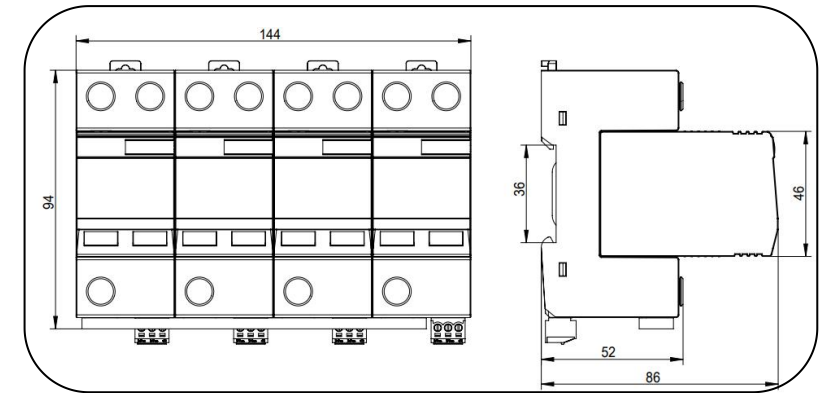

Dimension drawing

The BP25VT 4P is class I & class II (or T1+T2 ) prewired four poles combined SPD designed for low-voltage power system lightning current & surge protection, especially for location of high risk exposure or LPZ 0-2 building entrances ( IEC 62305-4) to against the damage from direct or close lightning strikes.

With built in Safesurge VT technology, BP25VT ensures remarkable lightning current discharge capacity up to 25kA 10/350μs and No leakage current & No follow current. It can be applied in most electrical installation and provide better reliability and safety protection, and particularly suitable for system with permanent insulation monitoring.

A notable feature of BP25VT is dual module redundancy design, two individual MOV protection modules in parallel in one pole SPD with two indication windows, so that the SPD could keep on working in spite of one protection module fault or one indication window turns to red. That will help to realize the uninterrupted surge protection, since user can replace the failure models according to the timing and the condition.

- TUV certified T1+ T2 SPD per IEC/EN 61643-11 standard.
- Prewired four poles SPD (“4+0” circuit) for use in three phase TN / TT systems.
- Unique thermal disconnecter design provides quick thermal response and secure disconnection
- Dual module redundancy for one pole SPD and dual fault indication windows, with optional remote signal contact.
- Lightning current capacity up to 25 kA10/350μs, surge current capability up to 100kA 8/20μs
- Low voltage protection level due to VT tech.
- High short-circuit current rating up to 50kArms, suitable for application in most AC power system.
- Long service life because of no leakage current and follow current
- Better reliability and robustness, Higher TOV (Temporary Over-Voltage) withstanding performance
- Pluggable module for easy replacement without the need to remove system wiring.
- Comply with UL1449 5<sup>th</sup>, IEEE C62.41, CSA C22.2 standards

## POWER SUPPLY SYSTEM


### Technical data

Part No.	BP25VT/75(-S)/4P	BP25VT/150(-S)/4P	BP25VT/180(-S)/4P	BP25VT/275(-S)/4P	BP25VT/320(-S)/4P	BP25VT/350(-S)/4P	BP25VT/385(-S)/4P	BP25VT/440(-S)/4P	BP25VT/480(-S)/4P	BP25VT/600(-S)/4P	BP25VT/750(-S)/4P
In accordance with	IEC/EN 61643-11:2011; UL1449 5th										
Category IEC/EU/VDE	I+ II /1+2/ B+C										
Protection mode	L-PE , N-PE										
Nominal Voltage (AC)    Un	60V	120V	120V	230V	230V	277V	277V	400V	400V	480V	690V
Power frequency	50/60Hz										
Max. continuous operating voltage(AC) Uc	75V	150V	180V	275V	320V	350V	385V	440V	480V	600V	750V
Nominal discharge current (8/20)    In	25kA										
Max. discharge current (8/20)    I <sub>max</sub>	100kA										
Lightning impulse current (10/350)    I <sub>imp</sub>	25kA	25kA	25kA	25kA	25kA	25kA	25kA	25kA	22kA	15kA	12.5kA
Voltage protection level    Up	0.6kV	0.7kV	0.8kV	1.0kV	1.2kV	1.4kV	1.6kV	1.8kV	2.0kV	2.2kV	2.5kV
Response time    t <sub>A</sub>	≤25ns										
Temporary overvoltage TOV    U <sub>T</sub> Withstand mode 120min	115V	228V	242V	442V	442V	528V	528V	763V	763V	915V	1145V
Follow current & interrupt rating    I <sub>fi</sub>	No										
Leakage current    I <sub>pe</sub>	0mA										
Short-circuit current rating    I <sub>sscr</sub>	50kArms										
Backup fuse(only required if not already provided in mains)	≤315A gL/gG										
Operating temperature range	-40°C ~ +85°C										
Altitude	-500m ~ +4000m										
Cross-section of connection wire (max)	Single-strand 35mm <sup>2</sup> ; multi-strand 25mm <sup>2</sup>										
Mounting	35mm DIN-rail in accordance with EN 50022/DIN46277-3										
Enclosure material	Thermoplastic; extinguishing degree UL94 V-0										
Degree of protection	IP20										
Installation width	8 modules, DIN 43880										
Thermal disconnecter	Internal    Green – normal ; red - failure										
Remote alarm contact	Optional										
Approvals, Certifications	TUV, CE										
Additional data for Remote Alarm Contacts											
Remote alarm contact type	Isolated Form C										
Switching capability Un/In	AC: 250V/0.5A					DC: 250V/0.1A; 125V/0.2A; 75V/0.5A					
Cross-section of remote signaling wire	Max. 1.5mm <sup>2</sup> (or # 16AWG)										


## POWER SUPPLY SYSTEM

### Class I + Class II (T1+T2), Four poles Surge Arresters

#### BP25VT...3PN100

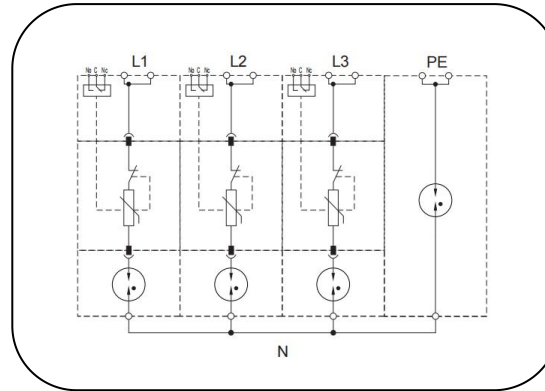

Basic circuit diagram

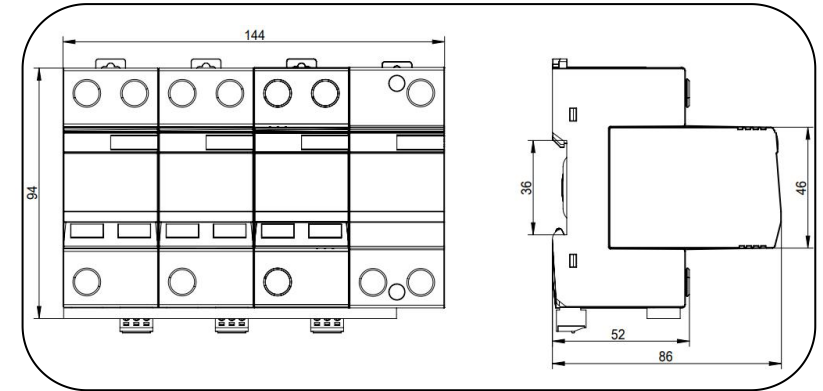

Dimension drawing

The BP25VT 3PN100 is class I & class II (or T1+T2) prewired four poles SPD designed for low-voltage power system lightning current & surge protection, especially for location of high risk exposure or LPZ 0-2 building entrances (IEC 62305-4) to against the damage from direct or close lightning strikes.

With built in Safesurge VT technology, BP25VT ensures remarkable lightning current discharge capacity up to 25kA 10/350μs and No leakage current & No follow current. It can be applied in most electrical installation and provide better reliability and safety protection, and particularly suitable for system with permanent insulation monitoring.

A notable feature of BP25VT is dual module redundancy design, two individual MOV protection modules in parallel in one pole SPD with two indication windows, so that the SPD could keep on working in spite of one protection module fault or one indication window turns to red. That will help to realize the uninterrupted surge protection, since user can replace the failure models according to the timing and the condition.

- TUV certified T1+ T2 SPD per IEC/EN 61643-11 standard
- Prewired four poles SPD ("3+1" circuit) for use in three phase TN/TT systems
- Unique thermal disconnecter design provides quick thermal response and secure disconnection
- Dual module redundancy for one pole SPD and dual fault indication windows, with optional remote signal contact.
- Lightning current capacity up to 25kA 10/350μs (L-N), 100kA 10/350μs (N-PE); Surge current capability up to 100kA 8/20μs (L-N), 150kA 8/20μs (N-PE)
- Low voltage protection level due to VT tech.
- High short-circuit current rating up to 50kArms, suitable for application in most AC power system.
- Long service life because of no leakage current and follow current
- Better reliability and robustness, Higher TOV (Temporary Over-Voltage) withstanding performance
- Pluggable module for easy replacement without the need to remove system wiring.
- Comply with UL1449 5<sup>th</sup>, IEEE C62.41, CSA C22.2 standards

## POWER SUPPLY SYSTEM

### Technical data

Part No.		BP25VT/150(-S)/ 3PN100	BP25VT/180(-S)/ 3PN100	BP25VT/275(-S)/ 3PN100	BP25VT/320(-S)/ 3PN100	BP25VT/350(-S)/ 3PN100	BP25VT/385(-S)/ 3PN100	BP25VT/440(-S)/ 3PN100I	BP25VT/440(-S)/ 3PN100	
In accordance with		IEC/EN 61643-11:2011; UL1449 5th								
Category IEC/EU/VDE		I+ II /1+2/ B+C								
Protection mode		L-N ,N-PE								
Max. continuous operating voltage(AC) Uc	L-N	150V	180V	275V	320V	350V	385V	440V	440V	
	N-PE	150V	150V	255V	255V	255V	255V	255V	440V	
Nominal discharge current (8/20) In	L-N	25kA								
	N-PE	100kA								
Max. discharge current (8/20) Imax	L-N	100kA								
	N-PE	150kA								
Lightning impulse current (10/350) Iimp	L-N	25kA	25kA	25kA	25kA	25kA	25kA	25kA	25kA	
	N-PE	100kA	100kA	100kA	100kA	100kA	100kA	100kA	100kA	
Voltage protection level Up	L-N	0.7kV	0.8kV	1.0kV	1.2kV	1.4kV	1.6kV	1.8kV	1.8kV	
	N-PE	1.5kV	1.5kV	1.5kV	1.5kV	1.5kV	1.5kV	1.5kV	2.0kV	
Response time tA		L-N≤25ns; N-PE ≤100ns								
Temporary overvoltage TOV Ur Withstand mode	L-N	228V/120min	242V/120min	442V/120min	442V/120min	528V/120min	528V/120min	763V/120min	763V/120min	
	N-PE	1200V/200ms								
Follow current & interrupt rating Ifi		N-PE	100A							
Leakage current Ipe		0mA								
Short-circuit current rating Isscr		50kArms								
Backup fuse(only required if not already provided in mains)		≤315A gL/gG								
Operating temperature range		-40°C ~ +85°C								
Altitude		-500m ~ +4000m								
Cross-section of connection wire (max)		Single-strand 35mm²; multi-strand 25mm²								
Mounting		35mm DIN-rail in accordance with EN 50022/DIN46277-3								
Enclosure material		Thermoplastic; extinguishing degree UL94 V-0								
Degree of protection		IP20								
Installation width		8 modules, DIN 43880								
Thermal disconnecter		Internal Green – normal ; red - failure								
Remote alarm contact		Optional								
Approvals, Certifications		TUV, CE								
Additional data for Remote Alarm Contacts										
Remote alarm contact type		Isolated Form C								
Switching capability Un/In		AC: 250V/0.5A				DC: 250V/0.1A; 125V/0.2A; 75V/0.5A				
Cross-section of remote signaling wire (max)		1.5mm²(or # 16AWG)								