

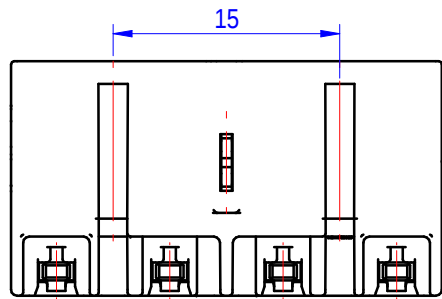
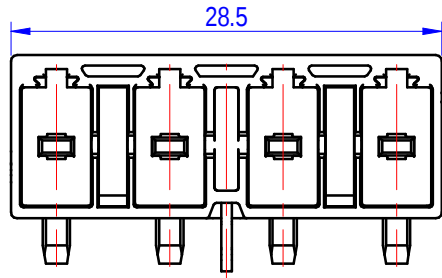
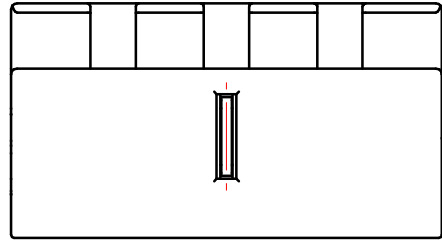


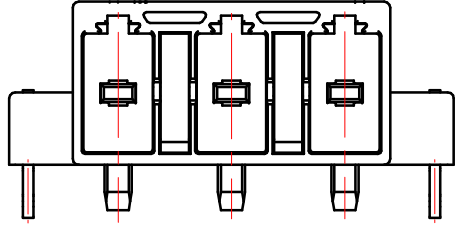




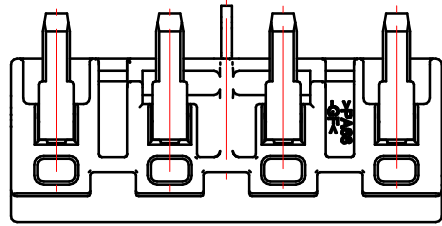
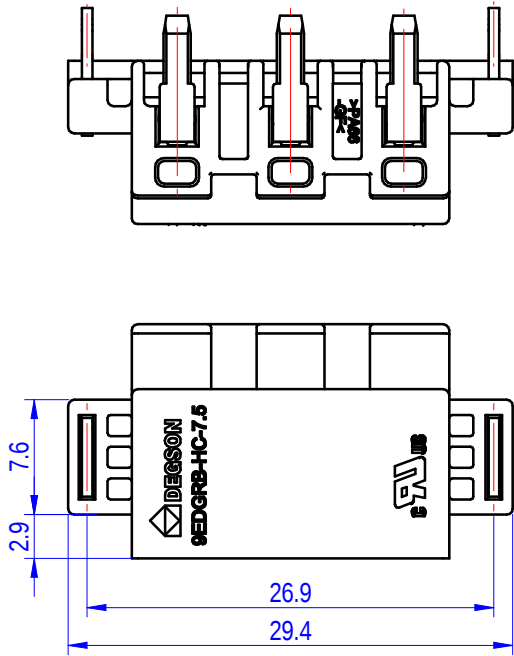


02P



03P

04P


未注公差/General tolerances (mm)											0.1/10					
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	±2°		
~	~	~	~	~	~	~	~	~	~	~	~	~				
3	6	10	18	30	50	80	120	180	250	315	400	500				
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.05 ±1.15 ±1.60 ±2.20 ±2.50																
UL 标准/UL Standard:											B		C		F	
额定电压/电压/Rated Voltage(V)/Current(A)											300/25		150/25		600/25	
IEC 标准/IEC Standard:																
过压类别/Overvoltage Category/污染等级/Pollution Degree											III/3		III/2		II/2	
额定电压/电压/Rated Voltage(V)/Current(A)											630/25		800/25		1000/25	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)											6		6		6	
间距/Pitch(mm)/线数范围/Poles											7.5 N= 02- 12P					
使用温度范围/Operating temperature(°C)											-40 ~ + 105					
符合RoHS环保要求/Conform to RoHS											Yes					
3		Fixed Foot					Stainless steel			Sn Plated						
2		Pin header					Copper			Sn Plated						
1		Housing					PA66+GF			UL94V-0						
ITEM		NAME OF PART					MATERIAL			NOTES						

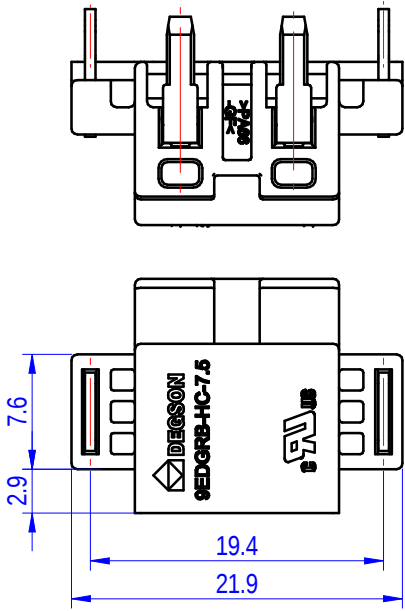

05~12P

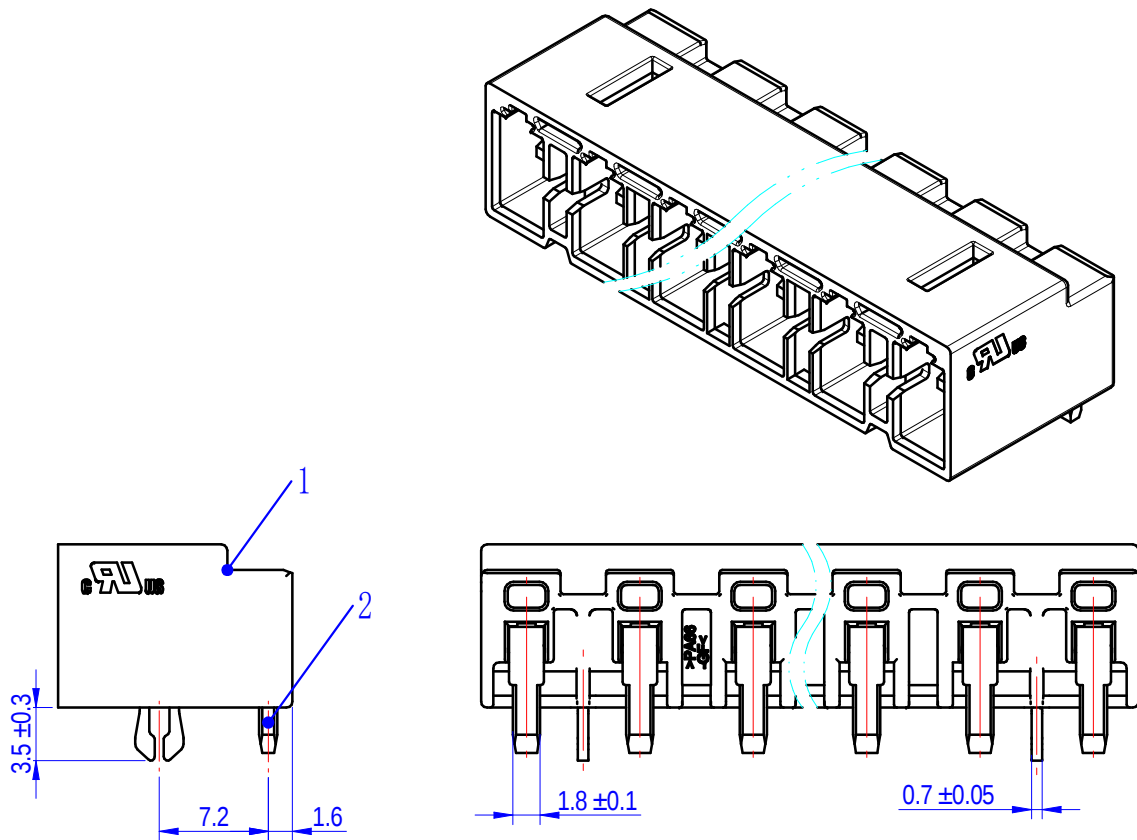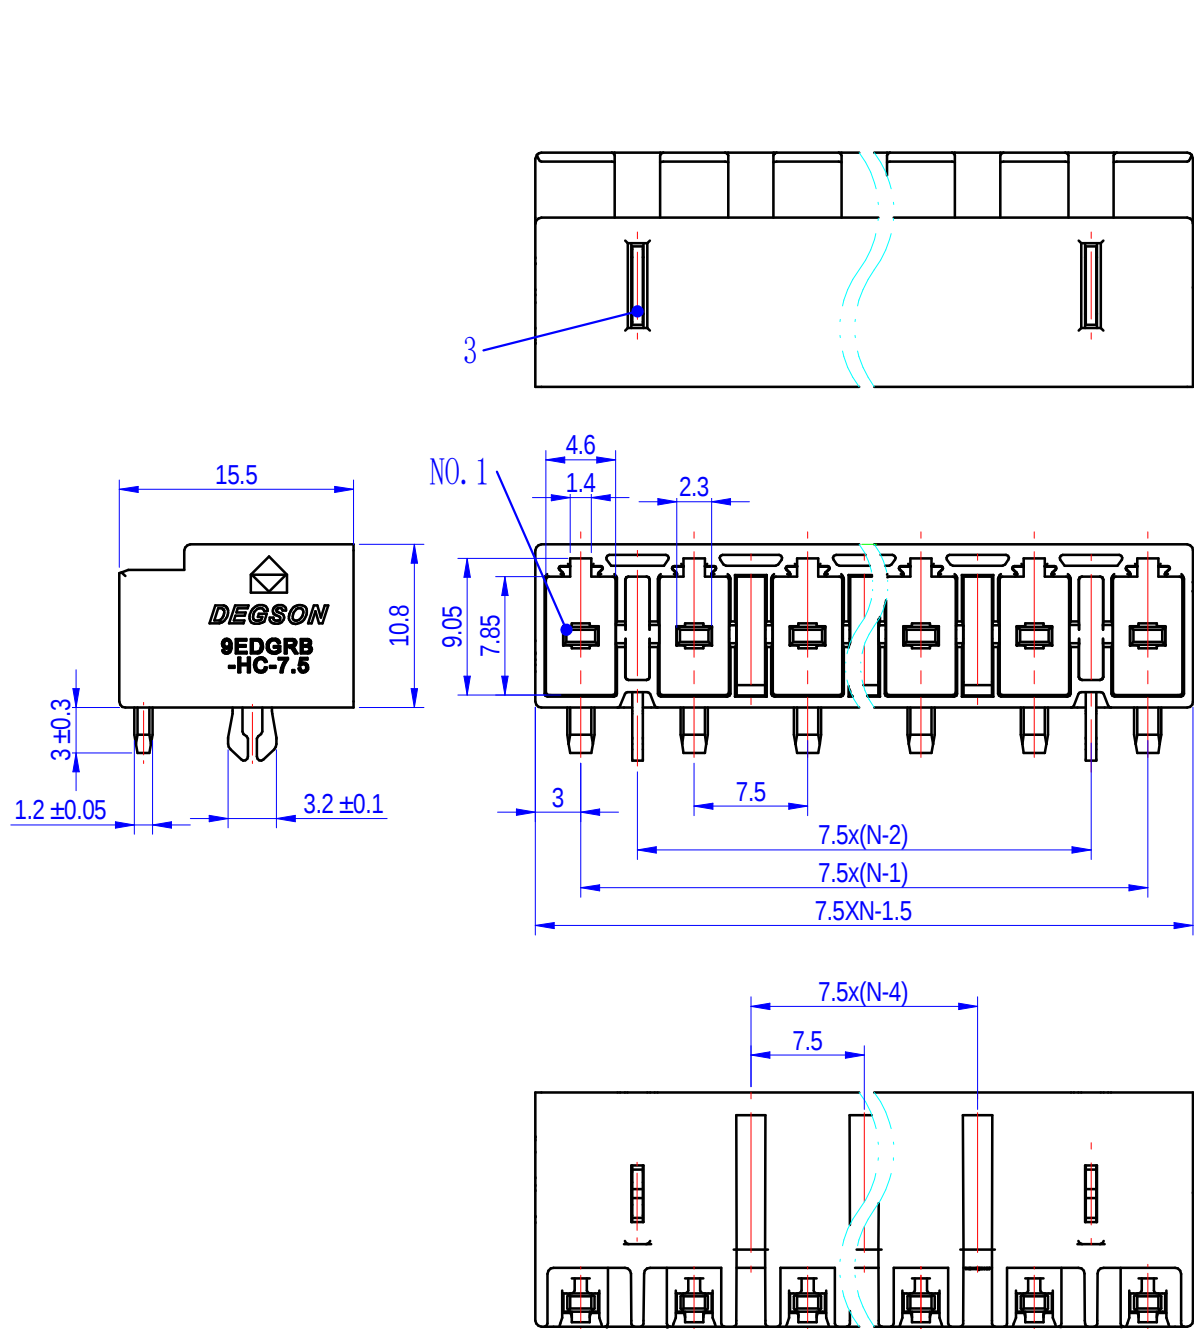


02P:PCB LAYOUT

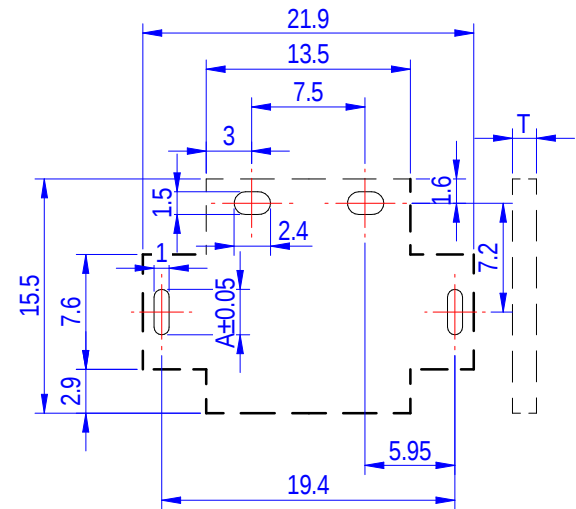


A=3.0(T:1.6),3.1(T:2.0)

03P:PCB LAYOUT

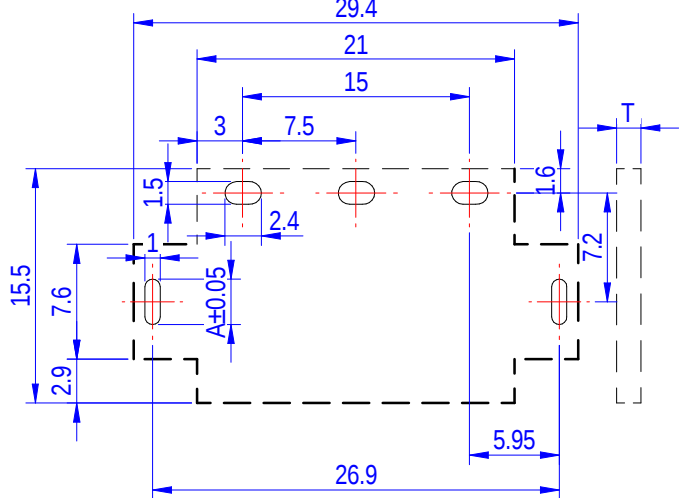

05~12P:PCB LAYOUT

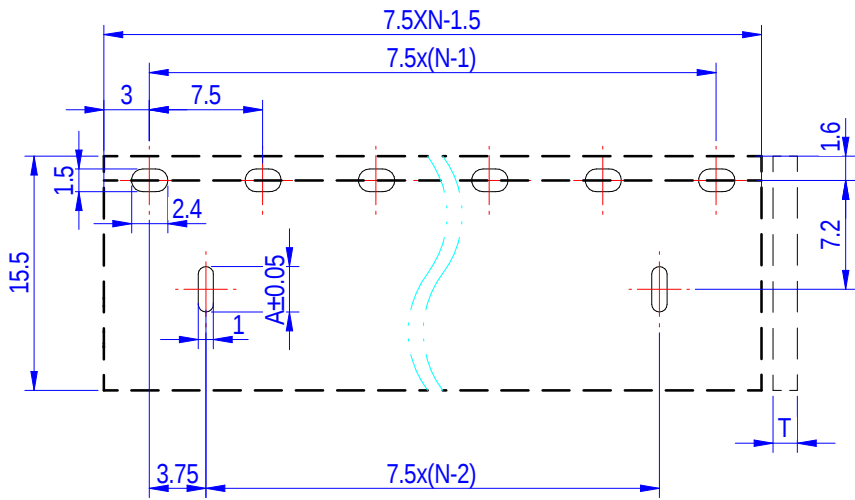

DEGSON		MATERIAL: 材质		SURFACE/COLOR: 表面处理	
APPD: 核准人		MAT NO./REV: 物料编码 / 版本		MAT STATUS: 物料状态	
CHKD: 审核人		NAME		9EDGRB-HC-7.5-XXP-1Y-00Z(H)	
DRAFT: 设计人		DRAWING NO.		DRAWING STATUS	
REV		图号		图纸状态	
ECN		图纸类型		SCALE	
DESCRIPTION		图号		1/2	